



FEEL THE SW  
DIFFERENCE.®

# DESIGNED TO ENHANCE WORKER PERFORMANCE.



**PF-95BL**

POWDER-FREE ECOTEK SUSTAINABLE  
NITRILE EXAMINATION GLOVES WITH DRY CORE\*


**KEEP HANDS COOLER AND MORE COMFORTABLE  
WITH PREMIUM EXAM QUALITY NITRILE GLOVES,  
FEATURING UNIQUE DRY CORE MOISTURE  
MANAGEMENT TECHNOLOGY.**

- Dry Core® Moisture Management Technology pulls sweat away from the skin
- EcoTek® Sustainable Technology\*
- Silicone-free for critical environments

ANSI Level 3  
Abrasion  
Protection

Fully textured  
surface for wet  
and dry grip

Tear-resistant  
beaded cuff for  
easy donning

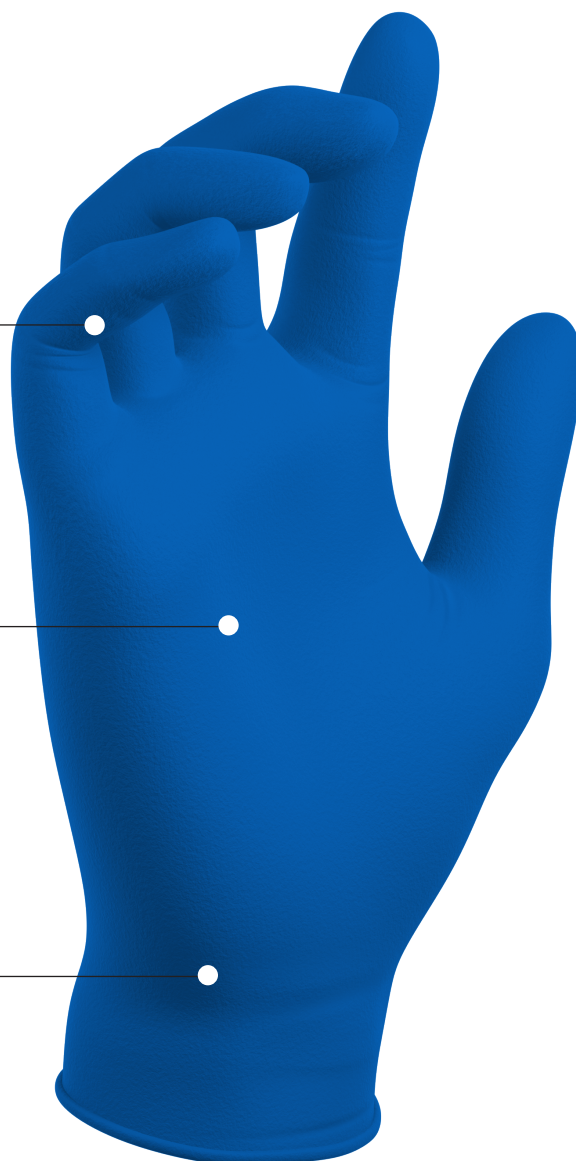

PF

PF-95BL

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 8.5g (large size)	 9.5"	 6.9 mil 6.1 mil	Dry Core® EcoTek®	 BLUE

ECOTEK



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2025 SW. All rights reserved.



## TECHNICAL DATA



### PF-95BL

POWDER-FREE ECOTEK SUSTAINABLE  
NITRILE EXAMINATION GLOVES WITH DRY CORE\*

### POLYCARBIN

THIS GLOVE IS RECYCLABLE THROUGH  
POLYCARBIN'S LAB RECYCLING PROGRAM.

## PRODUCT DESCRIPTION

### SPECIFICATIONS

PRODUCT		PowerForm®	
GRADE		Powder-Free Exam	
MATERIAL		Nitrile	
THICKNESS	FINGER	6.9mil	0.18mm
	PALM	6.1mil	0.16mm
	CUFF	5.1mil	0.13mm
COLOR	OUTER	Blue	
	INNER	White	
SURFACE	OUTER	Fully Textured	
	INNER	Dry Core®	
LENGTH		9.5"	242mm
WEIGHT		8.5g	
FIT TYPE		Ambidextrous	
CUFF TYPE		Beaded	
WATERTIGHT AQL		1.5	
ORIGIN COUNTRY		China	

\* Specifications based on size Large glove

### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	20 MPa	19 MPa
ELONGATION:	560%	550%

### INTEGRATED TECHNOLOGIES

**DRY CORE** Moisture Management Technology:  
Absorbent lining wicks away moisture for added comfort in extended use.

**ECOTEK** Sustainable Technology: Product has been tested per ASTM D5526\*



## STANDARDS & CERTIFICATIONS

EN ISO 21420:2020  
EN 455-2000-2015  
ASTM D6319-19  
ASTM F1671-13  
ASTM F739-12  
Reach EU 1907/2006  
EU 2016/425

ANSI/ISEA 105-2016  
CAT III Complex Design  
FDA 21 CFR 177.2600



Please visit [swswglobal.com/symbols](http://swswglobal.com/symbols) for information on standards used on this document.

## ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N106551	XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
N106552	S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
N106553	M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
N106554	L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
N106555	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N106556	2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case

## TECHNOLOGY PATENTS

US-8499363B2, US-8752215B2,  
US-10251435B1, US 12,201,172 B2

Multiple U.S. and other patents pending

## APPLICATIONS

For Medical Use  
Chemical Handling  
Clinical  
Laboratory  
Liquid Handling  
Pharma Production

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N10655X0825



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2025 SW. All rights reserved.



\*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swswglobal.com](mailto:cs@swswglobal.com).