



FEEL THE SW
DIFFERENCE®

DESIGNED TO ENHANCE WORKER PERFORMANCE.



PowerForm®

PF-95GY

SWEAT ABSORBING EXAMINATION ECOTEK
SUSTAINABLE NITRILE SINGLE-USE GLOVES*

**WORK WITH CONFIDENCE AND COMFORT
IN SUSTAINABLE GLOVES WITH EXCLUSIVE
DRI TEK SWEAT MANAGEMENT TECHNOLOGY***


- DriTek® Comfort Technology with absorbent lining that wicks away moisture for all day comfort
- EcoTek® Sustainable Technology*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

PF

PF-95GY

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 8.8g (large size)	 9.5"	 8.2 mil 6.2 mil	DriTek® EcoTek®	 GRAY


ECOTEK



ANSI Level 1
Puncture
resistance

Fully textured
surface for wet
and dry grip

Tear-resistant
beaded cuff for
easy donning

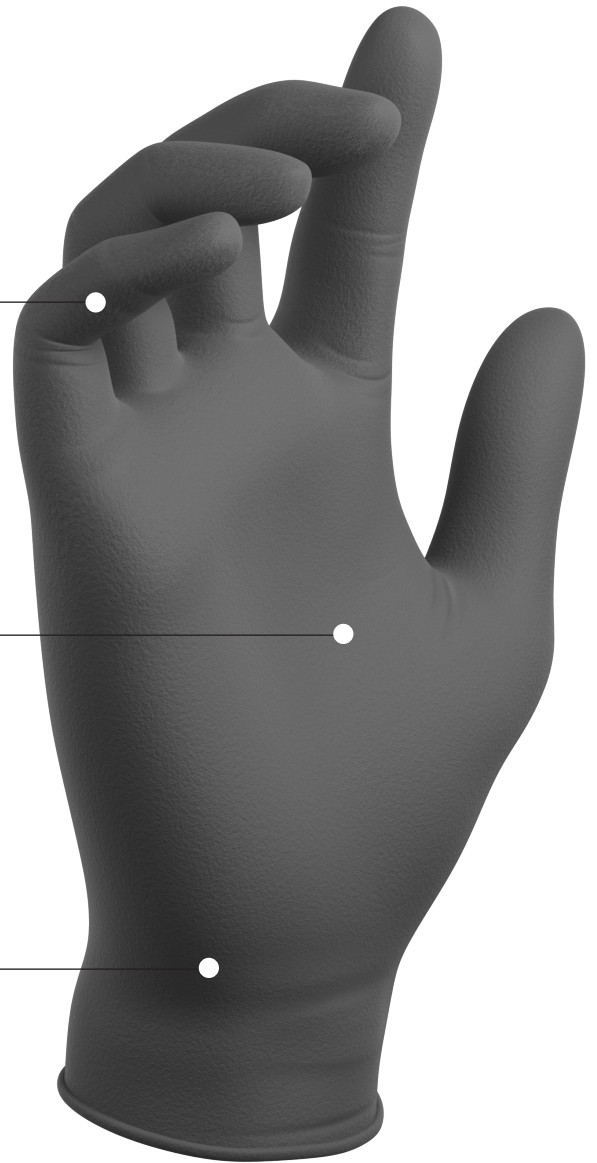

Feel the
difference.™

SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2025 SW. All rights reserved.



WOMEN
OWNED



TECHNICAL DATA



PF-95GY

SWEAT ABSORBING EXAMINATION ECOTEK
SUSTAINABLE NITRILE SINGLE-USE GLOVES*

POLYCARBIN

THIS GLOVE IS RECYCLABLE THROUGH
POLYCARBIN'S LAB RECYCLING PROGRAM.

PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	PowerForm®
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS	FINGER 8.2mil 0.21mm
	PALM 6.2mil 0.16mm
	CUFF 5.9mil 0.15mm
COLOR	Gray
SURFACE	OUTER Fully Textured
	INNER DriTek®
LENGTH	9.5" 242mm
WEIGHT	8.8g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China/Sri Lanka

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	15 MPa	15 MPa
ELONGATION:	550%	500%

INTEGRATED TECHNOLOGIES

DRIOTEK Comfort Technology:
Advanced flock lining is a soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*


100% Air Inspected



* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020	EU 2016/425
EN 455-2000-2015	ANSI/ISEA 105-2016
ASTM D6319-19	CAT III Complex Design
ASTM D6978-05 (2019)	FDA 21 CFR 177.2600
ASTM F1671-13	
ASTM F739-12	
Reach EU 1907/2006	

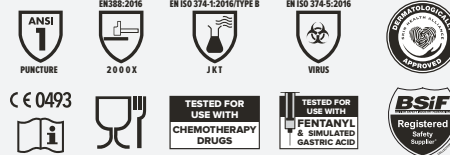

Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260501	XS 5½ – 6	3.0" 75mm	50 gloves per box 10 boxes per case
N260502	S 6½ – 7	3.3" 85mm	50 gloves per box 10 boxes per case
N260503	M 7½ – 8	3.7" 95mm	50 gloves per box 10 boxes per case
N260504	L 8½ – 9	4.2" 107mm	50 gloves per box 10 boxes per case
N260505	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260506	2XL 10½ – 11	4.9" 124mm	50 gloves per box 10 boxes per case

TECHNOLOGY PATENTS

US 12,201,172 B2

Multiple U.S. and other patents pending

APPLICATIONS

For Medical Use
First Responder EMS
Laboratory Cleaning

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N26050X0825



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2025 SW. All rights reserved.



*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.