



FEEL THE SW  
DIFFERENCE®

# COMFORT AND DEXTERITY FOR EVERYDAY HAND PROTECTION.



TF-12LG





POWDER-FREE NITRILE EXTENDED-CUFF  
EXAMINATION GLOVES WITH SUSTAINABLE  
ECOTEK TECHNOLOGY

## TACTILE SENSITIVITY AND GRIP WITH AN EXTENDED CUFF FOR ADDED PROTECTION TO WORK IN COMFORT AND CONFIDENCE

- EcoTek® Sustainable Technology\*
- Exceeds 1.5 AQL laboratory standards
- Extended-cuff for additional protection
- Tear-resistant beaded cuff eases donning
- SHA Dermatologically Approved

TF

TF-12LG

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 7.5g (large size)	 12.0"	 5.9 mil 4.9 mil	EcoTek® Clean Washed Air Inspected	 LIGHT GREEN


EcoTek



Optimal thickness  
for durability and  
tactile sensitivity

Extended cuff  
provides added  
protection

Tear-resistant  
beaded cuff for  
easy donning

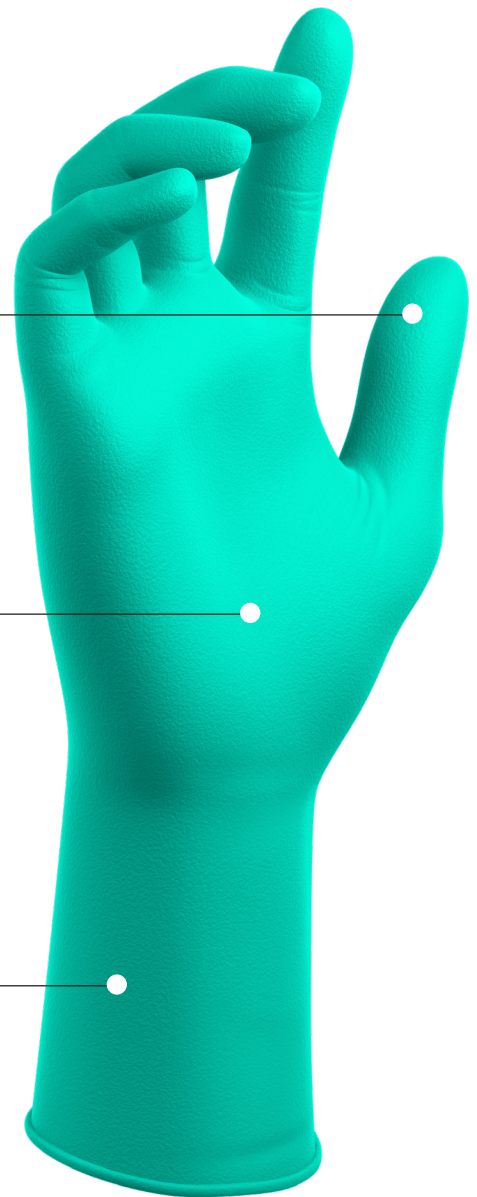

SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2025 SW. All rights reserved.



## TECHNICAL DATA



### TF-12LG

POWDER-FREE NITRILE EXTENDED-CUFF  
EXAMINATION GLOVES WITH SUSTAINABLE ECOTEK TECHNOLOGY

#### POLYCARBIN

THIS GLOVE IS RECYCLABLE THROUGH  
POLYCARBIN'S LAB RECYCLING PROGRAM.

## PRODUCT DESCRIPTION

### SPECIFICATIONS

PRODUCT	TrueForm®
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS FINGER	5.9mil 0.15mm
PALM	4.9mil 0.12mm
CUFF	3.6mil 0.09mm
COLOR	Light Green
SURFACE	Fully Textured
LENGTH	12" 305mm
WEIGHT	7.5g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China/Malaysia

### PHYSICAL PROPERTIES


	PRE-AGING	POST-AGING
TENSILE STRENGTH:	21 MPA	19 MPA
ELONGATION:	580%	550%

### INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526\*

100% Air Inspected

Clean Washed

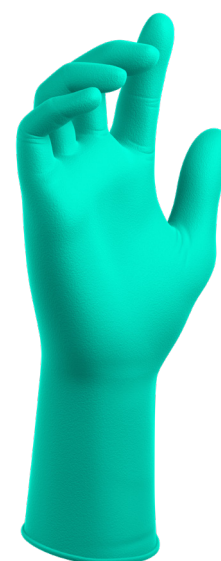

\* Specifications based on size Large glove

## STANDARDS & CERTIFICATIONS

EN ISO 21420:2020  
EN 455-2000-2015  
ASTM D6319-19  
ASTM D6978-05 (2019)  
ASTM F1671-13  
ASTM F739-12  
Reach EU 1907/2006

EU 2016/425  
CAT III Complex Design  
UL NFPA 1999-2018  
FDA 21 CFR 177.2600



Please visit [swssglobal.com/symbols](http://swssglobal.com/symbols) for information on standards used on this document.

## TECHNOLOGY PATENTS

US 12,201,172 B2

Multiple U.S. and other patents pending

## ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N027401	XS 5½ – 6	3.1" 78mm	100 gloves per box 10 boxes per case
N027402	S 6½ – 7	3.4" 87mm	100 gloves per box 10 boxes per case
N027403	M 7½ – 8	3.9" 98mm	100 gloves per box 10 boxes per case
N027404	L 8½ – 9	4.2" 108mm	100 gloves per box 10 boxes per case
N027405	XL 9½ – 10	4.5" 114mm	100 gloves per box 10 boxes per case
N027406	2XL 10½ – 11	4.7" 120mm	90 gloves per box 10 boxes per case

## APPLICATIONS

For Medical Use  
Chemical Handling  
Clinical  
Handling and Packaging Class 1  
Medical Devices  
Laboratory  
Light Chemical Mixing  
Pharma Production

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N02740X0825



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2025 SW. All rights reserved.



\*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swssglobal.com](mailto:cs@swssglobal.com).