



FEEL THE SW  
DIFFERENCE®

# DURABILITY THAT'S ON CALL FOR THE TOUGHEST OF JOBS.



## MegaMan®

**MM-11BK**

POWDER-FREE ECOTEK SUSTAINABLE  
EXAMINATION GLOVES WITH MOISTURE-  
WICKING DRITEK TECHNOLOGY

### SWEAT MANAGEMENT AND ANSI LEVEL 3 ABRASION RESISTANCE FOR THE ULTIMATE IN COMFORT AND PERFORMANCE

- DriTek® Comfort Technology with absorbent lining wicks away moisture for all day comfort
- EcoTek® Sustainable Technology\*
- ANSI/EN Level 3 abrasion resistance for durability and extended wear
- Fully textured surface for excellent grip
- 1.5 AQL exceeds laboratory standards
- Up to 3x longer lasting than standard nitrile gloves
- SHA Dermatologically Approved
- UL NFPA 1999 Certified

**MM**

**MM-11BK**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 12.8g (large size)	 11"	 10.1 mil 8.5 mil	DriTek® EcoTek®	 BLACK


**ECOTEK**



ANSI/EN level 3  
abrasion resistance

Fully textured  
surface for wet  
and dry grip

Tear-resistant  
beaded cuff for  
easy donning

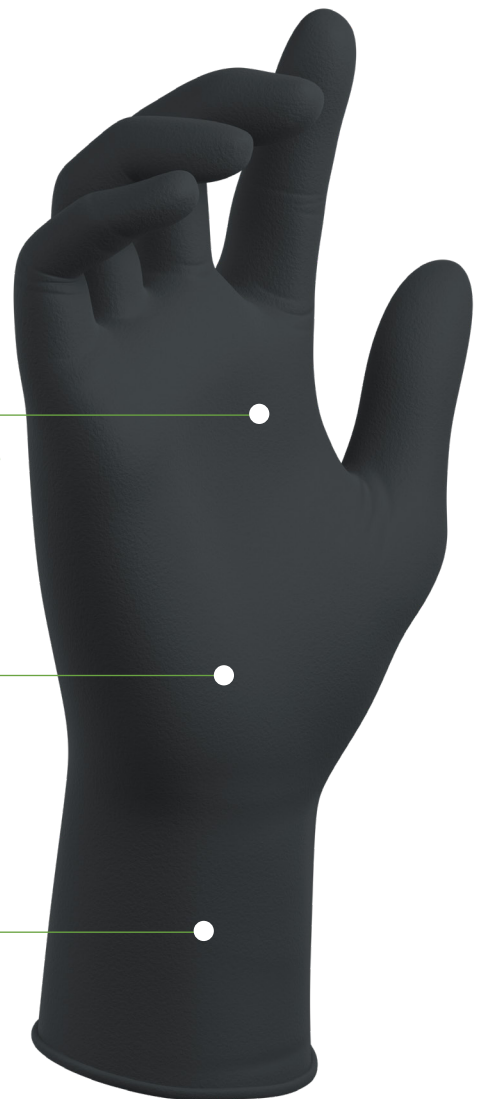

Feel the  
difference.™

SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2025 SW. All rights reserved.



WOMEN  
OWNED



## TECHNICAL DATA



### MM-11BK POWDER-FREE ECOTEK SUSTAINABLE EXAMINATION GLOVES WITH MOISTURE- WICKING DRI TEK TECHNOLOGY

#### POLYCARBIN

THIS GLOVE IS RECYCLABLE THROUGH  
POLYCARBIN'S LAB RECYCLING PROGRAM.

## PRODUCT DESCRIPTION

### SPECIFICATIONS

PRODUCT	MegaMan®
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS FINGER	10.1mil 0.26mm
PALM	8.5mil 0.22mm
CUFF	7.0mil 0.18mm
COLOR	Black
SURFACE OUTER	Fully Textured
INNER	DriTek®
LENGTH	11" 280mm
WEIGHT	12.8g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China/Sri Lanka

### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	17 MPa	16 MPa
ELONGATION:	560%	520%

### INTEGRATED TECHNOLOGIES

**DRI TEK** Comfort Technology:  
Advanced flock lining is a powder-free, soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.

**ECOTEK** Sustainable Technology: Product has been tested per ASTM D5526\*

100% Air Inspected



\* Specifications based on size Large glove

## STANDARDS & CERTIFICATIONS

EN ISO 21420:2020  
EN 455-2000-2015  
ASTM D6319-19  
ASTM D6978-05 (2019)  
ASTM F1671-13  
ASTM F739-12  
Reach EU 1907/2006

EU 2016/425  
ANSI/ISEA 105-2016  
CAT III Complex Design  
FDA 21 CFR 177.2600



Please visit [swssglobal.com/symbols](http://swssglobal.com/symbols) for information on standards used on this document.

## ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260881	XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
N260882	S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
N260883	M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
N260884	L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
N260885	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260886	2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case
N260887	3XL 11½ – 12	5.3" 134mm	50 gloves per box 10 boxes per case

## TECHNOLOGY PATENTS

US 12,201,172 B2

Multiple U.S. and other patents pending

## APPLICATIONS

For Medical Use

Chemical Handling

First Responder EMS

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N26088X0825



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2025 SW. All rights reserved.



\*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swssglobal.com](mailto:cs@swssglobal.com).